


Module for masonry walls IDEAFIX *BLU 4.5*

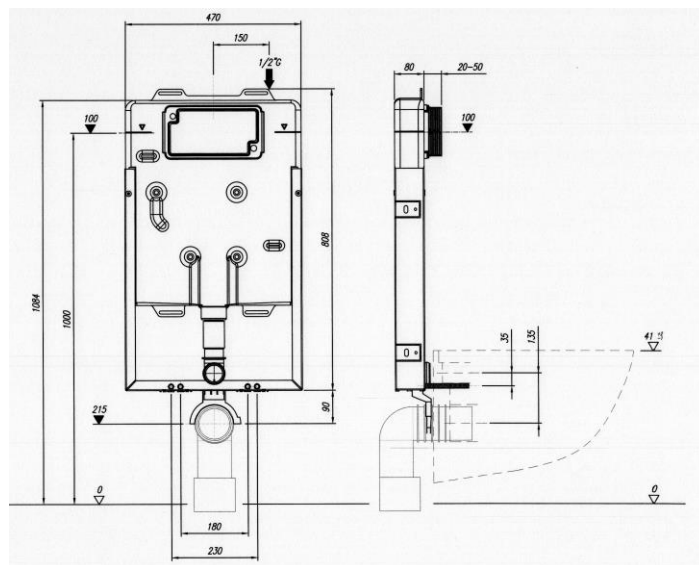

Application range

- Wall concealed installation
- Installation in masonry walls
- For wall hung WC, adjustable distance 18-23cm

Features

- in wall cistern with anti-condensation insulation
- front control plate
- Fully inspected cistern (replacement of flush valve and seal seat)
- equipped with quiet float valve compliance with DIN and NF standards, and with sanitizing liquid dispenser.
- Galvanized steel frame
- Fixing collar for drain pipe

Technical data

- | | |
|---------------------------------|------------|
| ○ Total capacity | Lt 10,5 |
| ○ Total flush volume adjustment | Lt 4.5 - 6 |
| ○ Short flush volume | Lt 3 |
| ○ Flush pipe inside diameter | mm 50 |
| ○ Average flush speed | l/s 2,2 |
| ○ Operation | Dual flush |
| ○ Dispenser tank capacity | ml 500 |

Contents

- Insulated flush pipe
- Wc connection tube
- Angle stop valve
- Protection cover for inspection hole
- Fixing bolts and brackets
- Wall drain pipe Ø90

Item

20.18B/R IDEAFIX BLU 4.5