


## Module for masonry walls HIDROFIX *EVOLUTION*

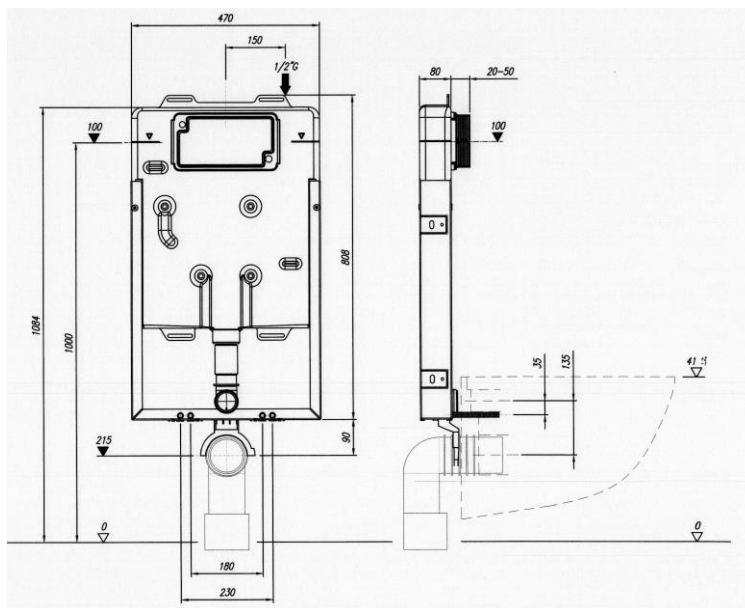

### Application range

- Wall concealed installation
- Installation in masonry walls
- For wall hung WC, adjustable distance 18-23cm

### Features

- in wall cistern with anti-condensation insulation
- front control plate
- Fully inspected cistern (replacement of flush valve and seal seat)
- Equipped with quiet float valve compliance with DIN and NF standards
- Galvanized steel frame
- Fixing collar for drain pipe

### Technical data

- Total capacity Lt 10,5
- Total flush volume adjustment Lt 6-9
- Short flush volume Lt 3
- Flush pipe inside diameter mm 50
- Average flush speed l/s 2,2
- Action dual flush

### Contents

- Insulated flush pipe
- Wc connection tube
- Angle stop valve
- Protection cover for inspection hole
- Fixing bolts and brackets
- Wall drain pipe Ø90

### Item

14.18E/0C Hidrofix Evolution