


## Module for masonry walls HIDROFIX MONO

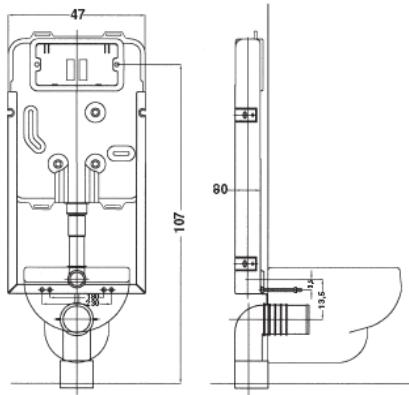

### Application range

- Wall concealed installation
- Installation in masonry walls
- For wall hung WC, adjustable distance 18-23cm

### Features

- in wall cistern with anti-condensation insulation
- front control plate
- Fully inspected cistern (replacement of flush valve and seal seat)
- equipped with quiet float valve compliance with DIN and NF standards
- Galvanized steel frame
- Fixing collar for drain pipe

### Technical data

○ Total capacity	Lt 10,5
○ Total flush volume adjustment	Lt 6-9
○ Flush pipe inside diameter	mm 50
○ Average flush speed	l/s 2,2
○ Operation	flush and stop action

### Contents

- Insulated flush pipe
- Wc connection tube
- Angle stop valve
- Protection cover for inspection hole
- Fixing bolts and brackets
- Wall drain pipe Ø90

### Item

14.17/OC Hidrofix Mono