


IN WALL FLUSH CISTERN *IDEA BLU*

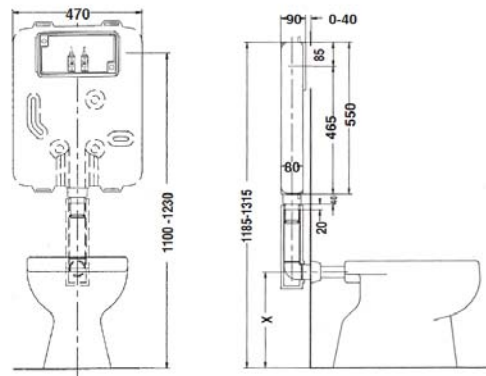

Field of application

- in wall installation
- installation in masonry walls
- for floor mounted toilets

Features

- in wall cistern with anti-condensation insulation
- front control plate
- fully inspected cistern (replacement of the flush valve and seal seat)
- equipped with quiet float valve compliance with DIN and NF standards, and with sanitizing liquid dispenser.

Technical data

- | | |
|-----------------------------------|------------|
| ○ Total capacity | Lt 10,5 |
| ○ Total flush volume adjustment | Lt 6-9 |
| ○ Short flush volume | Lt 3 |
| ○ Internal diameter of flush pipe | mm 50 |
| ○ Average flush speed | l/s 2,2 |
| ○ Operation | Dual flush |
| ○ Dispenser tank capacity | ml 500 |

Contents

- Insulated flush pipe
- Connection pipe to wc
- Stop valve
- protection cover of the inspection opening
- fixing bolts and brackets

Item

20.00B In wall cistern IDEA BLU

Certifications

The product complies with CE standards



(See attachment for declaration of performance)

ITS TODINI s.r.l. declares under its own exclusive responsibility that the above flush cisterns respect all the safety and functionality requirements regarding the use in sanitary plumbing as long as they are installed properly.

Product warranty

All models of in wall cisterns IDEA are guaranteed 10 years against material or workmanship defects

The warranty is valid from the date of purchase demonstrated, as long as installation instructions provided and correct mode of use are respected.

The warranty is void in case of damage caused by accident, misuse, unauthorized modification, improper installation or maintenance.

The duration of the rubber seals varies depending on local water conditions, so they are not covered by warranty.