


## IN WALL FLUSH CISTERN *IDEA*

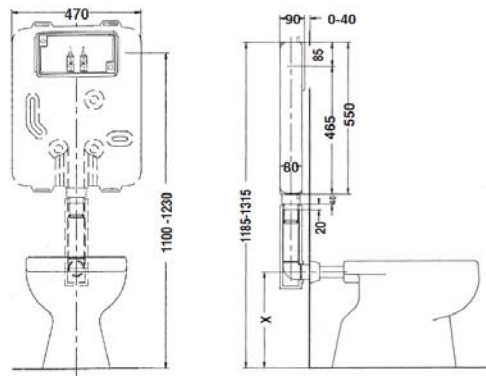

### Field of application

- in wall installation
- installation in masonry walls
- for floor mounted toilets

### Features

- in wall cistern with anti-condensation insulation
- front control plate
- fully inspected cistern (replacement of the flush valve and seal seat)
- equipped with quiet float valve compliance with DIN and NF standards

### Technical data

- |                                   |            |
|-----------------------------------|------------|
| ○ Total capacity                  | Lt 10,5    |
| ○ Total flush volume adjustment   | Lt 6-9     |
| ○ Short flush volume              | Lt 3       |
| ○ Internal diameter of flush pipe | mm 50      |
| ○ Average flush speed             | l/s 2,2    |
| ○ Operation                       | Dual flush |

### Equipment

- Insulated flush pipe
- Connection pipe to wc
- Stop valve
- protection cover of the inspection opening
- fixing screws and brackets

### Item

20.00 In wall cistern IDEA